



35-65 吨夹钳桥式起重机

Tongs bridge crane Cap.35-65t

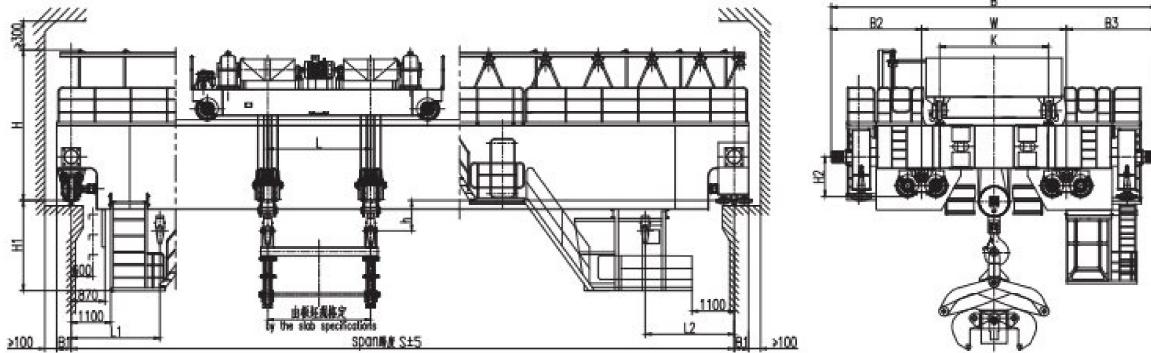

技术规格 Technical Specifications

净起重量 Clean weight			35	50	65
跨度 Span		m	27.5	37	35.5
起升高度 Lifting Height			12	12	12
工作制度 Duty			A7		
速度 Speed	起升 Hoisting	m/min	1.2~12	0.95~9.5	0.78~78
	小车运行 Crab travelling		4.2~42	3.8~38	3.8~38
	大车运行 trolley travelling		8.5~85	8~80	7.5~75
极限尺寸 limit dimensions	L1	mm	2500	2850	2650
	L2		2500	2500	2500
	L		3000	3000	3000
	h		750	850	950
主要尺寸 main dimensions	H	mm	4450	4850	4650
	H1		2650	2800	2700
	H2		1200	1200	1200
	B		9400	9400	9900
	K		3500	3500	4000
	W		4500	4500	5000
	B1		400	400	400
	B2		2450	2450	2450
B3	2450	2450	2450		
最大轮压 Max.Wheel Load	kN	375	485	465	
荐用钢轨 Crane Rail Recommended		QU120			
电源 Power Supply		三相交流 3-Phase A.C.50Hz 380V			

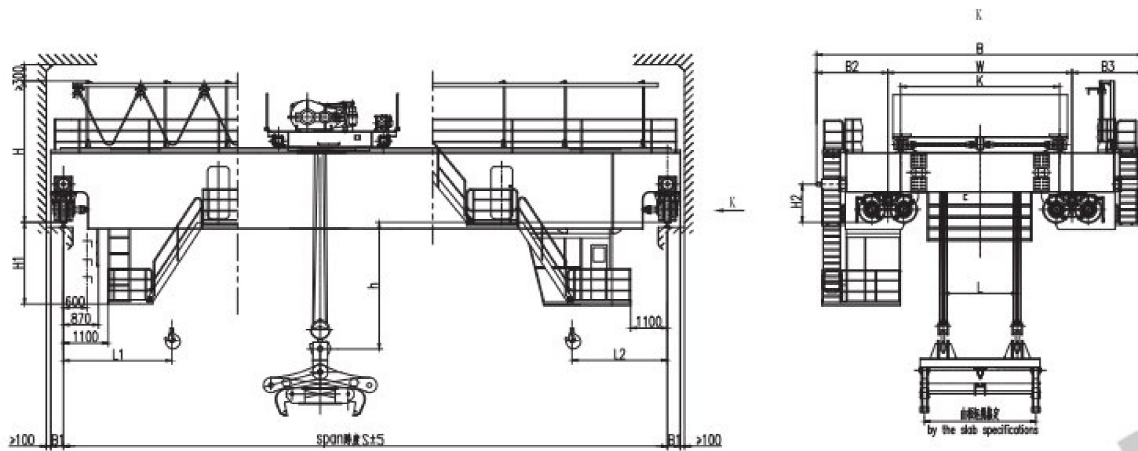

技术规格 Technical Specifications

净起重量 Clean weight		35	50	65	
跨度 Span	m	27.5	37	35.5	
起升高度 Lifting Height		12	12	12	
工作制度 Duty		A7			
速度 Speed	起升 Hoisting	m/min	0.95~9.5	0.95~9.5	0.78~78
	小车运行 Crab travelling		3.8~38	3.8~38	3.8~38
	大车运行 trolley travelling		8.5~85	8~80	7.5~75
极限尺寸 limit dimensions	L1	mm	2500	2500	2500
	L2		2500	2650	2650
	L		2500	2500	2500
	h		650	750	950
主要尺寸 main dimensions	H	mm	4450	4850	4650
	H1		2650	2800	2700
	H2		1200	1200	1200
	B		10900	10900	11400
	K		5000	5000	5500
	W		6000	6000	6500
	B1		400	400	400
	B2		2450	2450	2450
B3	2450	2450	2450		
最大轮压 Max.Wheel Load	kN	382	494	473	
荐用钢轨 Crane Rail Recommended		QU120			
电源 Power Supply		三相交流 3-Phase A.C.50Hz 380V			